



Part Number: D4C4910YMG-4K


Electrical Specifications

Frequency Range (GHz): 4.9 – 10.3
 Isolation (dB): 20 MIN (per junction)
 Insertion Loss (dB): 0.55 MAX (per junction)
 Return Loss (dB): 20 MIN (per junction)
 Forward Power (W): 20 AVG
 30 PK

Mechanical/Environmental Specifications

Connector Type: SMA
 Connector Body: Passivated stainless steel
 Connector Pin: Gold plated copper
 Magnetic Shunt: Nickel plated CRS
 Magnetically Shielded: Yes
 Optimized Temperature: < 4K
 Weight (oz) 4.0 MAX

D4C4910YMG-4K-2 Dimensions

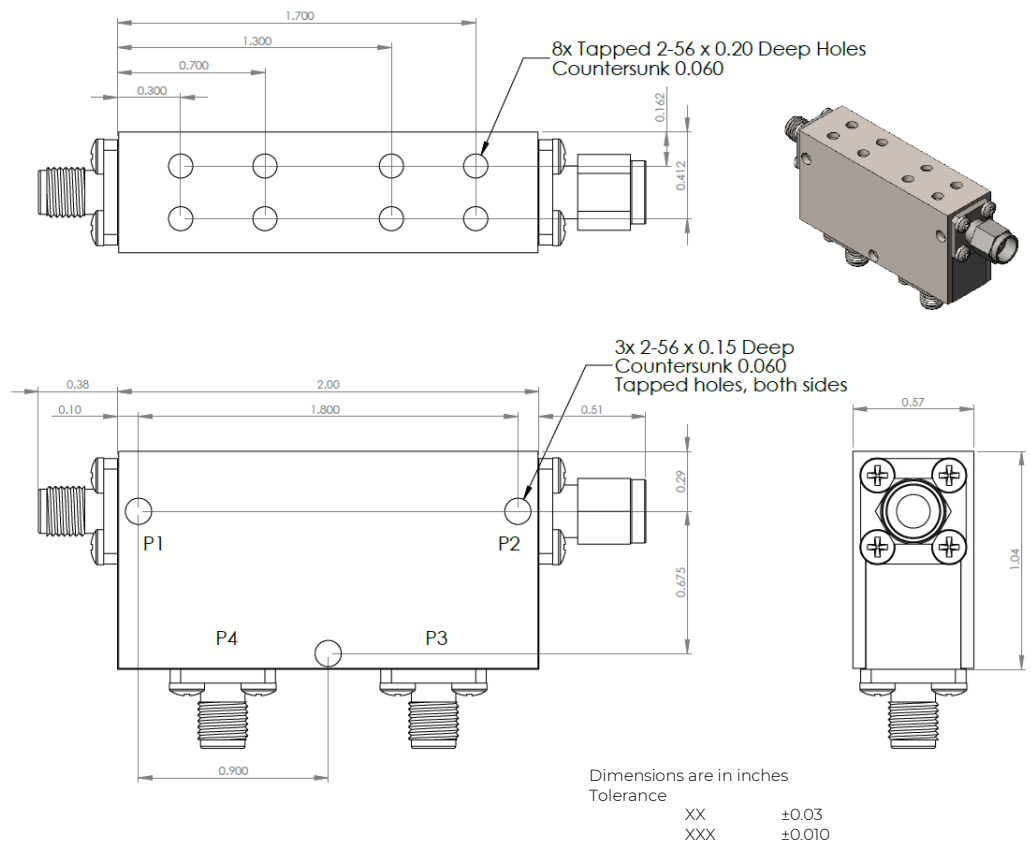

Type of Device	PN Suffix	Connector Configuration Port 1 / Port 2 / Port 3 / Port 4	PN Example
Dual Junction Circulator 4-Port Device Port 1 / Port 2 / Port 3 / Port 4	No Dash	Female / Female / Female / Female	D4C4910YMG-4K
	-1	Male / Female / Female / Female	D4C4910YMG-4K-1
	-2	Female / Male / Female / Female	D4C4910YMG-4K-2
	-3	Male / Male / Male / Male	D4C4910YMG-4K-3
	-4	Female / Female / Male / Female	D4C4910YMG-4K-4
	-5	Female / Female / Female / Male	D4C4910YMG-4K-5



MEASURED DATA

Part Number: D4C4910YMG-4K, P1→P2, P3 & P4 Terminated with 50Ω, Measured at 4K

