



Part Number: D3C1123Y-4K

Electrical Specifications

Frequency Range (GHz): 11.2 – 23.5

Isolation (dB): 17 MIN



Insertion Loss (dB): 1.0 MAX

Return Loss (dB): 12 MIN


Forward Power (W): 10 AVG

30 PK

D3C1123Y-4K

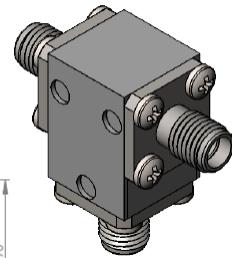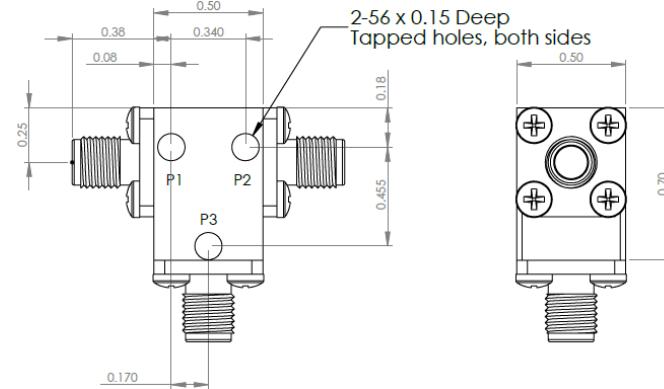

D3C1123Y-4K-3

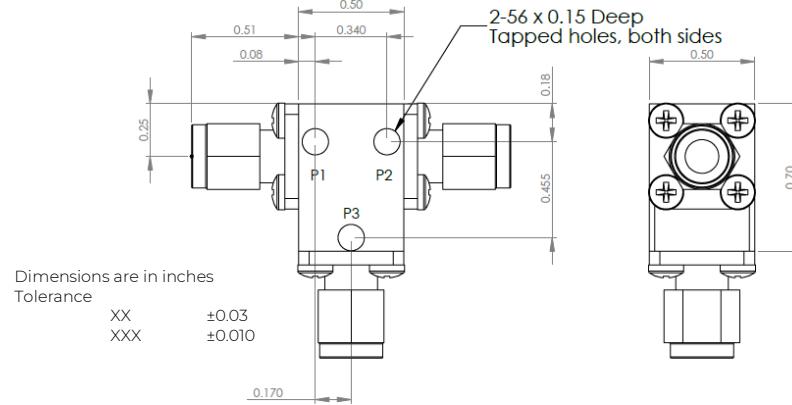

Mechanical/Environmental Specifications

Connector Type: SMA

Connector Body: Passivated stainless steel

Connector Pin: Gold plated copper

Magnetic Shunt: Nickel plated CRS

Optimized Temperature: < 4K

Weight (oz) 0.9 MAX

Type of Device	PN Suffix	Connector Configuration Port 1 / Port 2 / Port 3	PN Example
Single Junction Circulator 3-Port Device Port 1 / Port 2 / Port 3	No Dash	Female / Female / Female	D3C1123Y-4K
	-1	Male / Female / Female	D3C1123Y-4K-1
	-2	Female / Male / Female	D3C1123Y-4K-2
	-3	Male / Male / Male	D3C1123Y-4K-3
	-4	Female / Female / Male	D3C1123Y-4K-4
	-5	Male / Female / Male	D3C1123Y-4K-5
	-6	Male / Male / Female	D3C1123Y-4K-6
	-7	Female / Male / Male	D3C1123Y-4K-7

MEASURED DATA

Part Number: D3C1123Y-4K, P1→P2, P3 Terminated with 50Ω, Measured at 4K

