



Part Number: D3C1726Y-77K


Electrical Specifications

Frequency Range (GHz):	1.74 – 2.57
Isolation (dB):	12 MIN
Insertion Loss (dB):	0.9 MAX
Return Loss (dB):	12 MIN
Forward Power (W):	150 AVG
	750 PK


Mechanical/Environmental Specifications

Connector Type:	SMA	
Connector Body:	Passivated stainless steel	
Connector Pin:	Gold plated copper	
Magnetic Shunt:	Nickel plated CRS	
Optimized Temperature:	< 77K	
Weight (oz)	2.0	MAX

D3C1726Y-77K

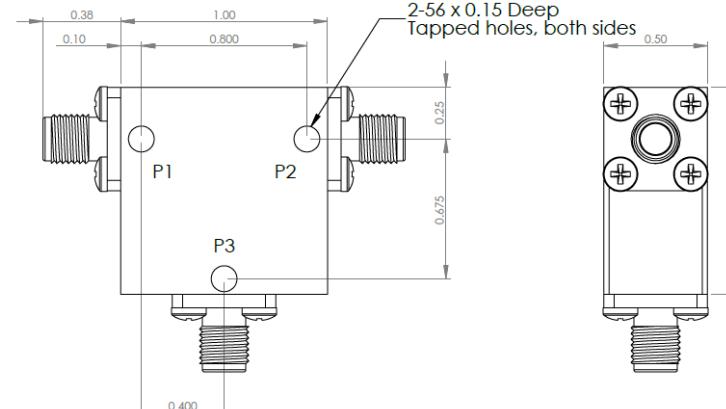

D3C1726Y-77K-3

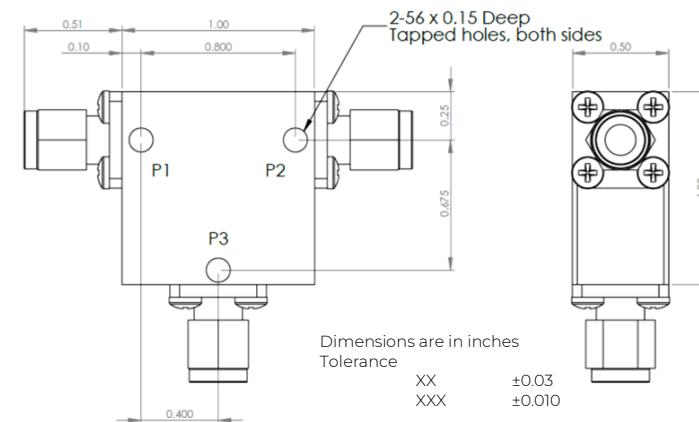

Type of Device	PN Suffix	Connector Configuration Port 1/Port 2/Port 3	PN Example
Single Junction Circulator 3-Port Device	No Dash	Female / Female / Female	D3C1726Y-77K
	-1	Male / Female / Female	D3C1726Y-77K-1
	-2	Female / Male / Female	D3C1726Y-77K-2
	-3	Male / Male / Male	D3C1726Y-77K-3
	-4	Female / Female / Male	D3C1726Y-77K-4
	-5	Male / Female / Male	D3C1726Y-77K-5
	-6	Male / Male / Female	D3C1726Y-77K-6
	-7	Female / Male / Male	D3C1726Y-77K-7

MEASURED DATA

Part Number: D3C1726Y-77K, P1→P2, P3 Terminated with 50Ω, Measured at 77K

